

Stainless steel differential pressure gauge

Model F5502

Max. static pressure 25 bar

Nominal size 100 mm or 160 mm

Accuracy: Class 2,5 (DIN); optional 1,6%

Features


- Stainless steel case and wetted parts
- Static pressure 25 bar, one side load permitted
- Protection IP65
- High corrosive resistance
- Dry or liquid filled

Ranges

0 ... 0,6 bar up to 0 ... 16 bar

Applications

Chemical and petrochemical industry
 Machine and apparatus construction
 Food and beverage industry
 Pulp and paper industry

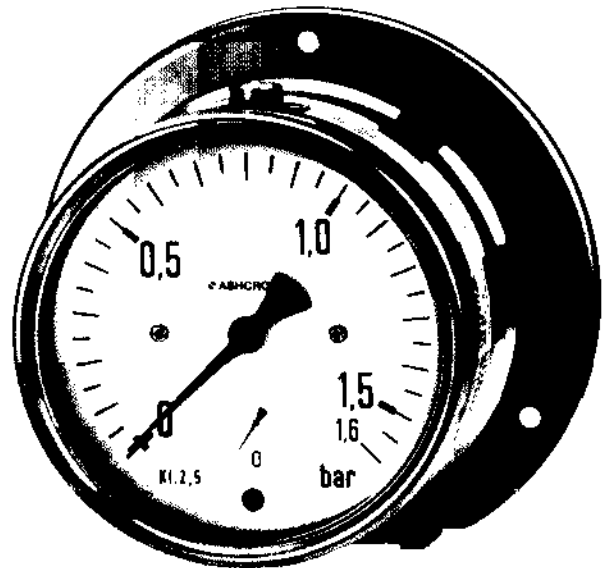

Technical specification	F5502	
	100	160
Dial size [mm]	100	160
Construction	Cylindrical case	
Zero adjustment	Internally, accessible if window is removed	
Measuring principle	Diaphragm (see rear side), safety design, solid front not required	
Range [bar]	0,6 1 1,6 2,5 4 6 10 16	
max. static pressure [bar]	25	
Overload capability	Static pressure is also maximum pressure allowed on one side	
Pressure type	Differential	
Process connection	G 1/4 B male, G 1/4 female, G 1/2 B male, G 1/2 female 1/4 NPT male, 1/4 NPT female, 1/2 NPT male, 1/2 NPT female, others on request	
Connection location	Lower	
Material		
Pressure connection	Stainless steel 316L (1.4404)	
Pressure chamber	Stainless steel 316L (1.4404), FPM O-ring	
Measuring membrane	Nickel Beryllium (NiBe)	
Case/bayonet ring	Stainless steel 304 (1.4301), optional 316 (1.4401)	
Window	Laminated safety glass	
Dial	Aluminum, black markings on white background	
Pointer	Aluminum, black, optional red set hand or maximum pointer	
Accuracy	Class 2,5 (2,5% F.S.), optional 1,6%	
Permissible		
Ambient temperature	-20 ... 80°C	
Medium temperature	Max. 100°C	
Storage temperature	-40 ... 60°C	
Effect	Max. 0,3% / 10 K	
Protection acc. EN 60 529/IEC 529	IP65	
Filling liquids	Glycerin, silicone, others on request	
Mounting	Wall mounting, optional 2" pipe mounting, others on request	
Weight dry/filled [kg]	3,6/3,8	3,8/4,2
Accessories, options	3 or 5 way remote or direct mounted manifolds, valves, gauges with 1 or 2 microswitch SPDT (inductive contacts on request)	

All specifications are subject to change without notice.

G1.F5502/E Rev. B 12/2002

